


Luminaire | Anti Corrosives

LinearPacCWS Colour and Wattage Switchable 600mm Anti-Corrosive

AU-ANT600CWS

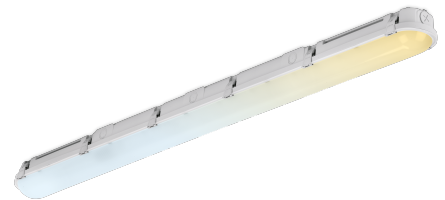

Photometrics

Wattage	7 / 9 / 12 / 14
Lumens	1260 - 2520
Lm/W	180
Lumens in EM Mode	250lm
Beam Angle	120
Colour Temperature	3000 / 4000 / 6500
RA	80
SDCM	6
UGR	>28

Product Features

Brand	Aurora
IP Rating	IP66
IK Rating	IK10
L70 Hours	50,000
Lifetime Class	L80 B10
SKU Type	Non Dim
Dimmable	No
Warranty	5 Years

Onsite Warranty	3 Years
Country of origin	CN

Electrical Specification

Input Voltage (Min)	220
Input Voltage (Max)	240
Input Voltage Type	AC
Power Factor	0.9
Surge Protection (kV)	2.0
Inrush Current (A)	7.2
Protection class	Class 1
Frequency (Min) Hz.	50
Frequency (Max) Hz.	60
Operating Temp. (Min) °C	-20
Operating Temp. (Max) °C	40

Physical Attributes

Length (mm)	670
Width (mm)	96
Height (mm)	78
Material	Polycarbonate
Optic Material	Opal Polycarbonate
Finish Colour	White

Features

Marketing Feature 1	Colour switchable between 3000K/4000K/6500K
Marketing Feature 2	Wattage switchable for 2ft, 4ft, 5ft, 6ft variants
Marketing Feature 3	Delivers up to 180lm/W
Marketing Feature 4	Plug and play module accessories to convert to Emergency, Emergency Self Test, Microwave Sensor with Corridor Function and DALI
Marketing Feature 5	Pre-drilled cable entry points on the back, suitable for 20mm conduit and knock out points on the side for up to 25mm
Marketing Feature 6	Wide surface bracket rail for flexibility whilst mounting

Marketing Feature 7	Detachable 4 way loop in/loop out terminal block
Marketing Feature 8	Detachable gear tray with BESA mounting points on the back
Marketing Feature 9	IP66 rated
Marketing Feature 10	IK10
Marketing Feature 11	L70 50,000h
Marketing Feature 12	5 year warranty
Marketing Feature 13	3 year on-site warranty (registration required) *Terms and conditions apply